


Carbide Tipped drill

ดอกสว่านปลายคาร์ไบด์ ก้านตรง



D402

Dc h8	Lc mm	L mm	Stock	Dc h8	Lc mm	L mm	Stock
2.0	24	49	○	7.6	75	117	○
2.1	24	49	○	7.7	75	117	○
2.2	27	53	○	7.8	75	117	○
2.3	27	53	○	7.9	75	117	○
2.4	30	57	○	8.0	75	117	○
2.5	30	57	○	8.1	75	117	○
2.6	30	57	○	8.2	75	117	○
2.7	33	61	○	8.3	75	117	○
2.8	33	61	○	8.4	75	117	○
2.9	33	61	○	8.5	75	117	○
3.0	33	61	○	8.6	81	125	○
3.1	36	65	○	8.7	81	125	○
3.2	36	65	○	8.8	81	125	○
3.3	36	65	○	8.9	81	125	○
3.4	39	70	○	9.0	81	125	○
3.5	39	70	○	9.1	81	125	○
3.6	39	70	○	9.2	81	125	○
3.7	39	70	○	9.3	81	125	○
3.8	43	75	○	9.4	81	125	○
3.9	43	75	○	9.5	81	125	○
4.0	43	75	○	9.6	87	133	○
4.1	43	75	○	9.7	87	133	○
4.2	43	75	○	9.8	87	133	○
4.3	47	80	○	9.9	87	133	○
4.4	47	80	○	10.0	87	133	○
4.5	47	80	○	10.2	87	133	○
4.6	47	80	○	10.5	87	133	○
4.7	47	80	○	11.0	94	142	○
4.8	52	86	○	11.5	94	142	○
4.9	52	86	○	12.0	101	151	○
5.0	52	86	○	12.5	101	151	○
5.1	52	86	○	13.0	101	151	○
5.2	52	86	○				
5.3	52	86	○				
5.4	57	93	○				
5.5	57	93	○				
5.6	57	93	○				
5.7	57	93	○				
5.8	57	93	○				
5.9	57	93	○				
6.0	57	93	○				
6.1	63	101	○				
6.2	63	101	○				
6.3	63	101	○				
6.4	63	101	○				
6.5	63	101	○				
6.6	63	101	○				
6.7	63	101	○				
6.8	69	109	○				
6.9	69	109	○				
7.0	69	109	○				
7.1	69	109	○				
7.2	69	109	○				
7.3	69	109	○				
7.4	69	109	○				
7.5	69	109	○				

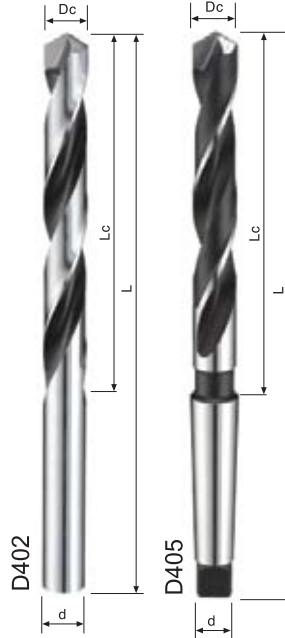

MG Carbide **Uncoated Blank**

5XD **2**

DIN 338 **118°**

Work Material

P	H	M	K	N	S
●			●		

- GR.4 硬化鋼30~38HRC Hardened Steel**
Vc.15-25 f.P168
- GR.5 硬化鋼38~48HRC Hardened Steel**
Vc.15-25 f.P168
- GR.6 硬化鋼48~56HRC Hardened Steel**
Vc.15-25 f.P168
- GR.7 硬化鋼56~68HRC Hardened Steel**
Vc.10-15 f.P168
- GR.9 鑄鐵 Cast Iron**
Vc.20-30 f.P168

Carbide Tipped drill - MT Taper shank

ดอกสว่านปลายคาร์ไบด์ ก้าน MT Taper

D405

DIN 345

Dc h8	Lc mm	L mm	d M.T.	Stock	Dc h8	Lc mm	L mm	d M.T.	Stock
13.0	101	182	1	○	22.0	150	248	2	○
13.5	108	189	1	○	22.5	155	253	2	○
14.0	108	189	1	○	23.0	155	253	2	○
14.5	114	212	2	○	23.5	155	276	3	○
15.0	114	212	2	○	24.0	160	281	3	○
15.5	120	218	2	○	24.5	160	281	3	○
16.0	120	218	2	○	25.0	160	281	3	○
16.5	125	223	2	○	26.0	165	286	3	○
17.0	125	223	2	○	27.0	170	291	3	○
17.5	130	228	2	○	28.0	170	291	3	○
18.0	130	228	2	○	29.0	175	296	3	○
18.5	135	233	2	○	30.0	175	296	3	○
19.0	135	233	2	○	31.0	180	301	3	○
19.5	140	238	2	○	32.0	185	334	4	○
20.0	140	238	2	○	33.0	185	334	4	○
20.5	145	243	2	○	34.0	190	339	4	○
21.0	145	243	2	○	35.0	190	339	4	○
21.5	150	248	2	○					