

A

Milling

B

Turning

C

Drilling

D

Tapping

E

Boring Reamer

F

Polishing

G

Tooling system & Accessories

## NC Spot drill 90 and 120 degree


ดอกนำศูนย์คาร์ไบด์ 90องศา และ 120องศา

Standard length

Dc h6	Lc mm	L mm	d h6	D903 Stock	D913 Stock
3	10	38	3	●	●
4	12	50	4	●	●
5	15	50	5	●	●
6	20	60	6	●	●
8	25	60	8	●	●
10	25	72	10	●	●
12	30	75	12	●	●
16	35	100	16	●	○
20	40	100	20	●	○

long length

Dc h6	Lc mm	L mm	d h6	D904 Stock	D914 Stock
6	20	100	6	●	●
8	25	125	8	●	●
10	25	150	10	●	●
12	30	150	12	●	●
16	35	150	16	○	○
20	40	150	20	○	○

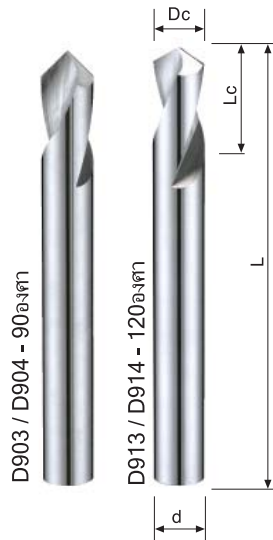

MG Carbide	Uncoated Blank
7Leaders Standard	

Work Material

P	H	M	K	N	S
●	●	○	●	○	○

### S383/S384


\*NC Spot drill รุ่น Economic series สำหรับ Dia 10-20mm หัวเป็น Carbide ก้านเป็น HSS กรุณาสอบถามเพิ่มเติม

## Carbide center drills + countersink

ดอกนำศูนย์คาร์ไบด์ 超硬センタードリル

D908

Dc h7	Lc mm	L mm	d h6	D908 Stock
0.50	0.8	38	3	●
0.80	1.1	38	3	●
1.00	1.3	38	3	●
1.25	1.6	38	3	●
1.60	2.0	38	4	●
2.00	2.5	50	5	●
2.50	3.1	50	6	●
3.15	3.9	63	8	●
4.00	5.0	66	10	●
5.00	6.3	73	12	●

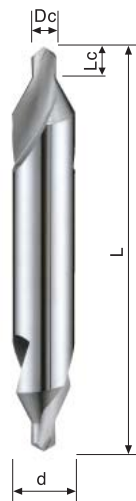

MG Carbide	Uncoated Blank
DIN 333	

Work Material

P	H	M	K	N	S
●	●	○	●	○	○

● : สต็อกในประเทศไทย  
○ : สต็อกในต่างประเทศ