


MICRO GRAIN CARBIDE HIGH PERFORMANCE DRILLS - Endmill Shank

With Coolant Hole - 2F(12xD) 高效能內冷鑽頭-長刃型-12xD (銑刀柄)

DSZ-HF2

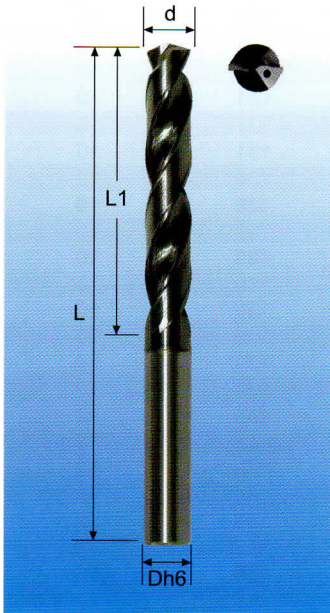

CUTTING EFFECTED LENGTH = 12xD

Dimension

- Win 142
- 140 Degree Tip Angle
- 25~35 Degree Helix Angle
- With Coolant Hole
- Four Margins
- AlTiN Coating

Tolerance

- d h7
- D h6

Material

- ALLOY STEELS
- STAINLESS STEELS
- CAST IRON
- TITANIUM STEELS

Recommend

Cutting Condition


Table 3

Order No. 訂購編號	Dia. 刃徑 (d)	CL 刃長 (L1)	OAL 全長 (L)	Shank 柄徑 (D)
DSZHF203006T	3.00	50	90	6
DSZHF203106T	3.10	50	90	6
DSZHF203176T	3.175	50	90	6
DSZHF203206T	3.20	50	90	6
DSZHF203306T	3.30	50	90	6
DSZHF203406T	3.40	50	90	6
DSZHF203506T	3.50	50	90	6
DSZHF203606T	3.60	50	90	6
DSZHF203706T	3.70	50	90	6
DSZHF203806T	3.80	64	102	6
DSZHF203906T	3.90	64	102	6
DSZHF204006T	4.00	64	102	6
DSZHF204106T	4.10	64	102	6
DSZHF204206T	4.20	64	102	6
DSZHF204306T	4.30	64	102	6
DSZHF204406T	4.40	64	102	6
DSZHF204506T	4.50	64	102	6
DSZHF204606T	4.60	64	102	6
DSZHF204706T	4.70	64	102	6
DSZHF204806T	4.80	78	116	6
DSZHF204906T	4.90	78	116	6
DSZHF205006T	5.00	78	116	6
DSZHF205106T	5.10	78	116	6
DSZHF205206T	5.20	78	116	6
DSZHF205306T	5.30	78	116	6
DSZHF205406T	5.40	78	116	6
DSZHF205506T	5.50	78	116	6
DSZHF205606T	5.60	78	116	6
DSZHF205706T	5.70	78	116	6
DSZHF205806T	5.80	78	116	6
DSZHF205906T	5.90	78	116	6
DSZHF206006T	6.00	78	116	6
DSZHF206106T	6.10	108	146	8
DSZHF206206T	6.20	108	146	8
DSZHF206306T	6.30	108	146	8
DSZHF206356T	6.35	108	146	8
DSZHF206406T	6.40	108	146	8
DSZHF206506T	6.50	108	146	8
DSZHF206606T	6.60	108	146	8
DSZHF206706T	6.70	108	146	8
DSZHF206806T	6.80	108	146	8
DSZHF206906T	6.90	108	146	8
DSZHF207006T	7.00	108	146	8
DSZHF207106T	7.10	108	146	8
DSZHF207206T	7.20	108	146	8
DSZHF207306T	7.30	108	146	8
DSZHF207406T	7.40	108	146	8
DSZHF207506T	7.50	108	146	8
DSZHF207606T	7.60	108	146	8
DSZHF207706T	7.70	108	146	8
DSZHF207806T	7.80	108	146	8
DSZHF207906T	7.90	108	146	8

MICRO GRAIN CARBIDE HIGH PERFORMANCE DRILLS - Endmill Shank

With Coolant Hole - 2F(12xD) 高效能內冷鑽頭-長刃型-12xD (銑刀柄)

DSZ-HF2

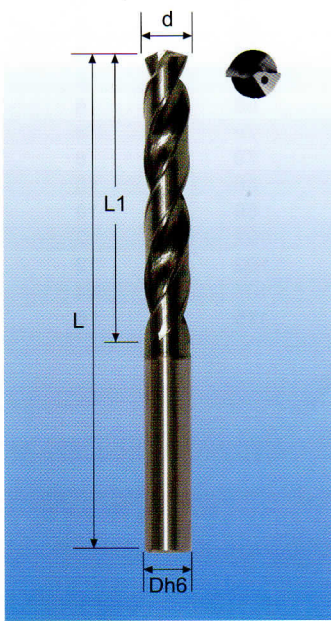

CUTTING EFFECTED LENGTH = 12xD

Order No. 訂購編號	Dia. 刃徑 (d)	CL 刃長 (L1)	OAL 全長 (L)	Shank 柄徑 (D)
DSZHF208006T	8.00	108	146	8
DSZHF208106T	8.10	120	162	10
DSZHF208206T	8.20	120	162	10
DSZHF208306T	8.30	120	162	10
DSZHF208406T	8.40	120	162	10
DSZHF208506T	8.50	120	162	10
DSZHF208606T	8.60	120	162	10
DSZHF208706T	8.70	120	162	10
DSZHF208806T	8.80	120	162	10
DSZHF208906T	8.90	120	162	10
DSZHF209006T	9.00	120	162	10
DSZHF209106T	9.10	120	162	10
DSZHF209206T	9.20	120	162	10
DSZHF209306T	9.30	120	162	10
DSZHF209406T	9.40	120	162	10
DSZHF209506T	9.50	120	162	10
DSZHF209526T	9.52	120	162	10
DSZHF209606T	9.60	120	162	10
DSZHF209706T	9.70	120	162	10
DSZHF209806T	9.80	120	162	10
DSZHF209906T	9.90	120	162	10
DSZHF210006T	10.00	120	162	10
DSZHF210206T	10.20	156	204	12
DSZHF210506T	10.50	156	204	12
DSZHF211006T	11.00	156	204	12
DSZHF211506T	11.50	156	204	12
DSZHF212006T	12.00	156	204	12

Dimension

- Win 412
- 140 Degree Tip Angle
- 25~35 Degree Helix Angle
- With Coolant Hole
- Four Margins
- AlTiN Coating

Tolerance

- d h7
- D h6

Material

- ALLOY STEELS
- STAINLESS STEELS
- CAST IRON
- TITANIUM STEELS

Recommend Cutting Condition