


MICRO GRAIN CARBIDE HARDENED DRILLS FOR HARDENED STEEL

- Endmill Shank - 2F(3xD)

高硬鑽頭-短刃型-3xD (銑刀柄)

DHT-NA2

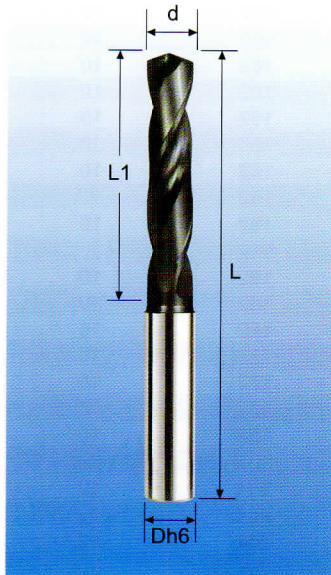

CUTTING EFFECTED LENGTH = 3xD

Order No. 訂購編號	Dia. 刃徑 (d)	CL 刃長 (L1)	OAL 全長 (L)	Shank 柄徑 (D)
DHTNA203006T	3.00	20	62	6
DHTNA203406T	3.40	20	62	6
DHTNA204006T	4.00	24	66	6
DHTNA204306T	4.30	24	66	6
DHTNA205006T	5.00	28	66	6
DHTNA205106T	5.10	28	66	6
DHTNA206006T	6.00	28	66	6
DHTNA206906T	6.90	34	79	8
DHTNA208006T	8.00	41	79	8
DHTNA208606T	8.60	47	89	10
DHTNA210006T	10.00	47	89	10
DHTNA210406T	10.40	55	102	12
DHTNA212006T	12.00	55	102	12
DHTNA214006T	14.00	60	107	14
DHTNA216006T	16.00	65	115	16

Dimension

- Sim. DIN6537
- 140 Degree Tip Angle
- 15~25 Degree Helix Angle
- Without Coolant Hole
- AlTiN Coating

Tolerance

- d h7
- D h6

Material

- HARDENED STEELS
- ~ HRC 50

Recommend Cutting Condition