


**MICRO GRAIN CARBIDE MICRO DRILLS FOR STEEL - Endmill Shank**

**DGM-NB2**

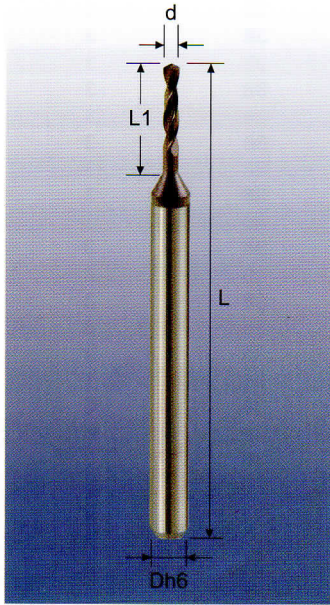

**- Micro Diameter - 2F**

微小徑鑽頭-標準型(3mm柄)

| Order No.<br>訂購編號 | Dia.<br>刀徑 (d) | CL<br>刃長 (L1) | OAL<br>全長 (L) | Shank<br>柄徑 (D) |
|-------------------|----------------|---------------|---------------|-----------------|
| DGMNB200505U      | 0.50           | 3.0           | 38            | 3               |
| DGMNB200605U      | 0.60           | 3.0           | 38            | 3               |
| DGMNB200705U      | 0.70           | 3.0           | 38            | 3               |
| DGMNB200805U      | 0.80           | 4.0           | 38            | 3               |
| DGMNB200905U      | 0.90           | 4.0           | 38            | 3               |
| DGMNB201005U      | 1.00           | 4.0           | 38            | 3               |
| DGMNB201105U      | 1.10           | 6.0           | 38            | 3               |
| DGMNB201205U      | 1.20           | 6.0           | 38            | 3               |
| DGMNB201305U      | 1.30           | 6.0           | 38            | 3               |
| DGMNB201405U      | 1.40           | 6.0           | 38            | 3               |
| DGMNB201505U      | 1.50           | 6.0           | 38            | 3               |
| DGMNB201605U      | 1.60           | 8.0           | 38            | 3               |
| DGMNB201705U      | 1.70           | 8.0           | 38            | 3               |
| DGMNB201805U      | 1.80           | 8.0           | 38            | 3               |
| DGMNB201905U      | 1.90           | 8.0           | 38            | 3               |
| DGMNB202005U      | 2.00           | 8.0           | 38            | 3               |
| DGMNB202105U      | 2.10           | 8.0           | 38            | 3               |
| DGMNB202205U      | 2.20           | 8.0           | 38            | 3               |
| DGMNB202305U      | 2.30           | 8.0           | 38            | 3               |
| DGMNB202405U      | 2.40           | 8.0           | 38            | 3               |
| DGMNB202505U      | 2.50           | 8.0           | 38            | 3               |
| DGMNB202605U      | 2.60           | 8.0           | 38            | 3               |
| DGMNB202705U      | 2.70           | 8.0           | 38            | 3               |
| DGMNB202805U      | 2.80           | 8.0           | 38            | 3               |
| DGMNB202905U      | 2.90           | 8.0           | 38            | 3               |
| DGMNB203005U      | 3.00           | 8.0           | 38            | 3               |

**Dimension**

- Win 038B
- 25~35 Degree Helix Angle
- 130 Degree Tip Angle
- S-Fire Coating

**Tolerance**

- d h7
- D h6

**Material**

- ALLOY STEELS
- STAINLESS STEELS

**Recommend  
Cutting Condition**